
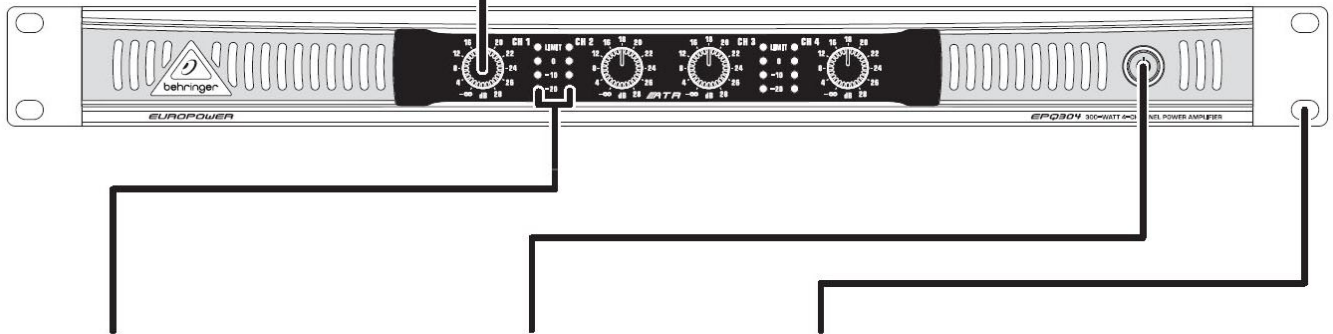


Amplifier Details

Front & Rear Panels

Front

GAIN CONTROLS —
Adjust the input level using these knobs. To increase signal gain, rotate the knobs clockwise; to reduce the gain, rotate the knobs counter-clockwise.

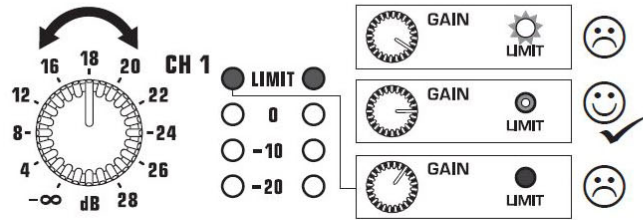


SIGNAL and LIMIT LEDs display the signal level for each channel. Reduce the input gain if the blue LIMIT LED lights up continuously.

POWER BUTTON/LED — Press this button to turn the amplifier on and off.

RACK EARS — Secure the unit into a rack using four attaching screws and washers (fasteners not included).

Rear

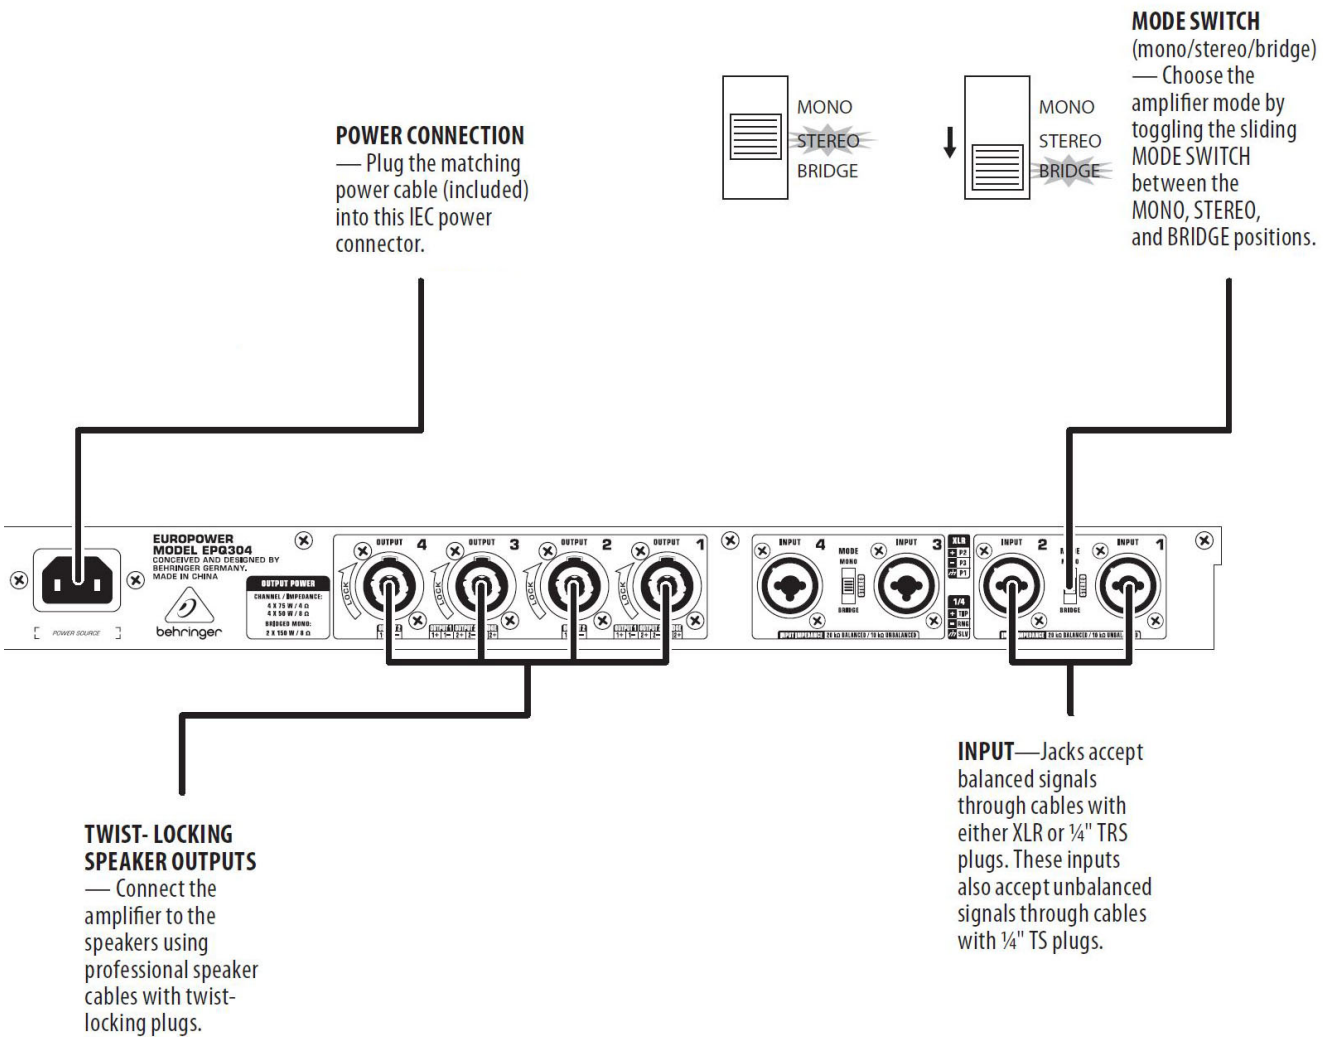

Note: It is important to check the mode switch to ensure it is in stereo mode for all outputs.

Operation

From: <https://www.x32-desk.toft.org.uk/> - Behringer X32 Manual

Permanent link: <https://www.x32-desk.toft.org.uk/doku.php?id=amplifier&rev=1742732662>

Last update: 2025/03/23 12:24

