
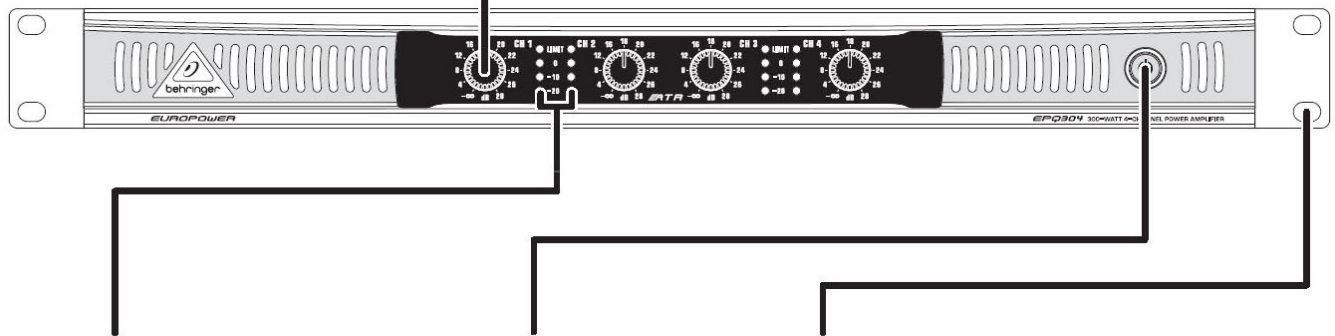


Amplifier Details

Front & Rear Panels

Front

GAIN CONTROLS —
Adjust the input level using these knobs. To increase signal gain, rotate the knobs clockwise; to reduce the gain, rotate the knobs counter-clockwise.

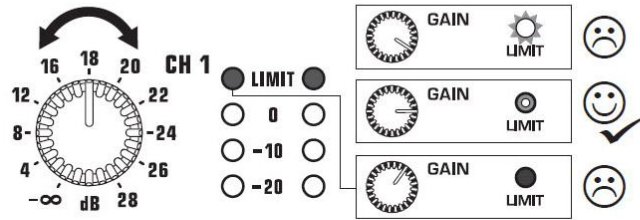


SIGNAL and LIMIT LEDs display the signal level for each channel. Reduce the input gain if the blue LIMIT LED lights up continuously.

POWER BUTTON/LED — Press this button to turn the amplifier on and off.

RACK EARS — Secure the unit into a rack using four attaching screws and washers (fasteners not included).

Rear

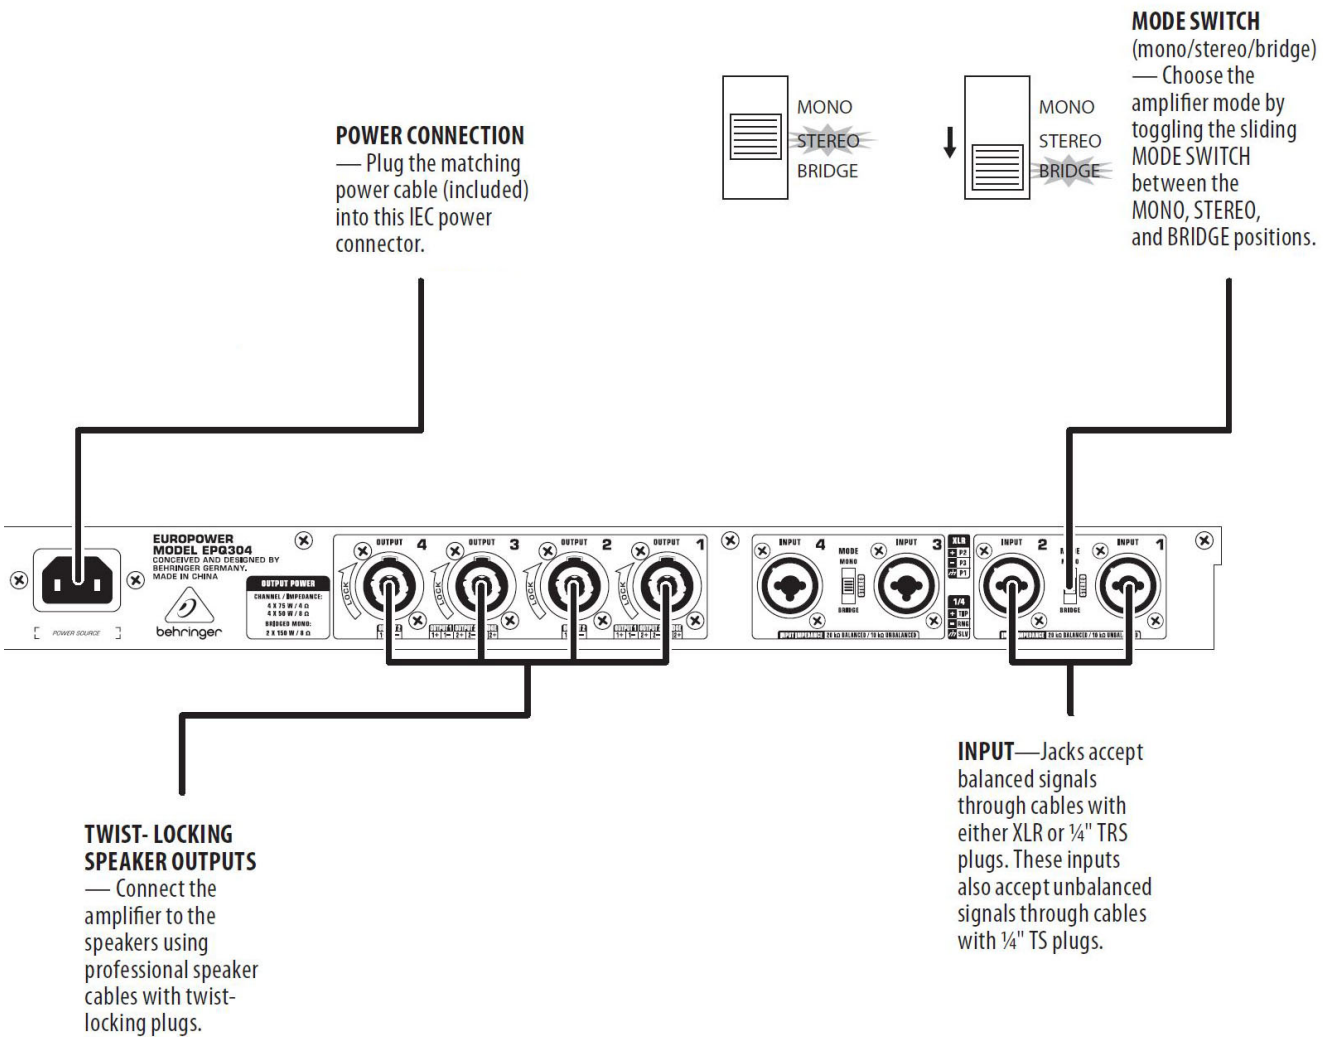

Operation

Note: It is important to check the mode switch to ensure it is in stereo mode for all outputs.

Recommended configuration

Input / Output Channel	S16 connection	Description
1	Output 1	Monitor House Left
2	Output 2	Monitor House Right
3	Output 7	Main speakers House Left
4	Output 8	Main speakers House Left

Note: House Left is left when looking towards the satge.

From:

<https://www.x32-desk.toft.org.uk/> - **Behringer X32 Manual**

Permanent link:

<https://www.x32-desk.toft.org.uk/doku.php?id=amplifier&rev=1742732964>

Last update: **2025/03/23 12:29**

